

Type D Pressure Gauge



- Even with reciprocating pumps, gauge provides quick, accurate response to pressure changes and minimizes fluctuations with a built-in dampening mechanism
- Temperature range: -50°F to 180°F
Liquid surrounding gauge mechanism minimizes wear from vibration and mechanical shock
- Heavy duty seals create watertight barrier around gauge mechanism
- Impact resistant, clear polymer lens
- Connects with threaded female 2" line pipe

To order, specify:

- ① Unit of measure and pressure range
- ② Type of service
- ③ RETSCO part number

Pressure Range	Standard Service	Salt Water Service	Corrosive Fluid Service
1,000 psi	771111	771121	771131
3,000 psi	771211	771221	771231
5,000 psi	771311	771321	771331
6,000 psi	771411	771411	771431
7,000 kPa	772111	772121	772131
21,000 kPa	772211	772221	772231
35,000 kPa	772311	772321	772331
42,000 kPa	772411	772421	772431
70 Bar	773111	773121	773131
210 Bar	773211	773221	773231
350 Bar	773311	773321	773331
420 Bar	773411	773421	773431


Also available in kg/cm²

Shipping Weights:	Standard service	26 lbs (11.9 kg)
	Salt water service	35 lbs (16 kg)
	Corrosive service	26 lbs (11.9 kg)

GAUGE REBUILDING SERVICE

RETSCO, INC. can rebuild damaged or worn gauges to "like new" condition. Contact your RETSCO distributor or sales representatives for more information.

Type E Pressure Gauge

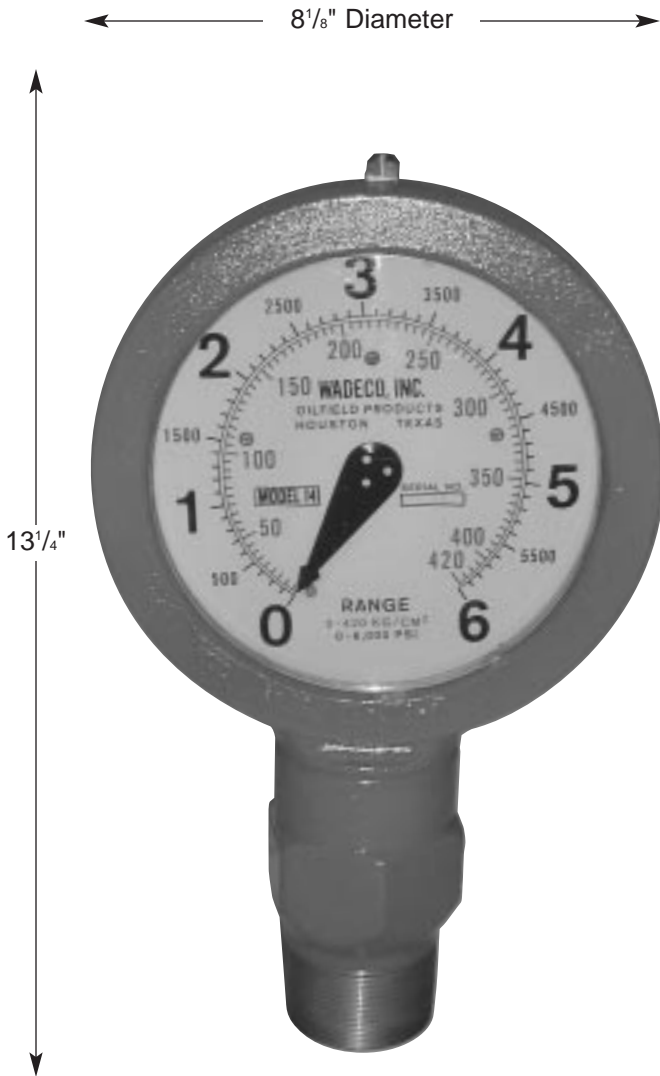

- Dual face pressure readings in: **psi** / kg/cm²
kPa / psi
Bar / psi
- 6" wide impact resistant, clear polymer lens
- Even with reciprocating pumps, gauge provides quick, accurate response to pressure changes and minimizes fluctuations with a built-in dampening mechanism
- Temperature range: -50°F to 180°F
Liquid surrounding gauge mechanism minimizes wear from vibration and mechanical shock
- Heavy duty seals create watertight barrier around gauge mechanism
- Installs easily with standard threaded male 2" line pipe and threaded female 1" line pipe connection

To order, specify:

- ① Unit of measure and pressure range
- ② Type of service
- ③ RETSCO part number

Pressure Range	Standard Service	Salt Water Service	Corrosive Fluid Service
1,000 psi / kg/cm ²	881111	881121	881131
3,000 psi / kg/cm ²	881211	881221	881231
6,000 psi / kg/cm ²	881411	881421	881431
10,000 psi / kg/cm ²	881511	881521	881531
15,000 psi / kg/cm ²	881611	881621	881631
20,000 psi / kg/cm ²	881711	881721	881731
7,000 kPa / psi	882111	882121	882131
21,000 kPa / psi	882211	882221	882231
42,000 kPa / psi	882411	882421	882431
70,000 kPa / psi	882511	882521	882531
104,000 kPa / psi	882611	882621	882631
140,000 kPa / psi	882711	882721	882731
70 Bar / psi	883111	883121	883131
210 Bar / psi	883211	883221	883231
420 Bar / psi	883411	883421	883431
700 Bar / psi	883511	883521	883531
1,040 Bar / psi	883611	883621	883631
1,400 Bar / psi	883711	883721	883731


GAUGE REBUILDING SERVICE

RETSCO, INC. can rebuild damaged or worn gauges to "like new" condition. Contact your RETSCO distributor or sales representatives for more information.

Shipping Weights: Standard service 20 lbs (9.1 kg)
Salt water service 34 lbs (15.5 kg)
Corrosive service 33 lbs (15 kg)

RETSCO, INC. • 7123 Breen Road • Houston, Texas 77086
(281) 931-7171 • (888) 242-0492 • (281) 931-7101 Fax

Type F Flanged Pressure Gauge

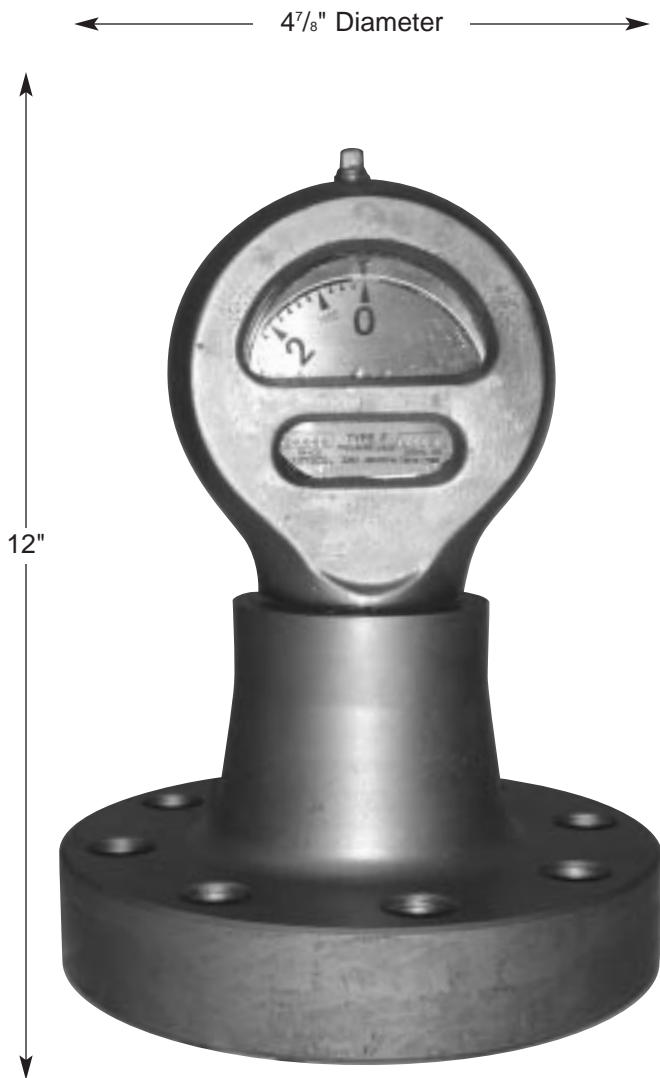

- Even with reciprocating pumps, gauge provides quick, accurate response to pressure changes and minimizes fluctuations with a built-in dampening mechanism
- Temperature range: -50°F to 180°F
Liquid surrounding gauge mechanism minimizes wear from vibration and mechanical shock
- Heavy duty seals create watertight barrier around gauge mechanism
- Impact resistant, clear polymer lens

To order, specify:

- ① Unit of measure and pressure range
 - ② Type of service
 - ③ Flange size (1¹³/₁₆ API 6BX or 2¹/₁₆ API 6BX)
- ✓ RETSCO part number

Pressure Range	Standard Service	Corrosive Fluid Service
10,000 psi	661541	661561
15,000 psi	661641	661661
20,000 psi	661741	661761
70,000 kPa	662541	662561
104,000 kPa	662641	662661
140,000 kPa	662741	662761
700 Bar	663541	663561
1,040 Bar	663641	663661
1,400 Bar	663741	663761

* Maximum height measurement 12" (varies with pressure range and flange size).

Also available in kg/cm²

Shipping Weights: 1¹³/₁₆ API 6BX 29 lbs (13.2 kg)

GAUGE REBUILDING SERVICE

RETSCO, INC. can rebuild damaged or worn gauges to "like new" condition. Contact your RETSCO distributor or sales representatives for more information.